

Gas Discharge Tubes (GDT)

2RS-8TX Series

Description

Using the technical requirements of the leading industry, RUILON has designed a super thin gas discharge tube, which is mainly used in the product's volume requirements and space constraints.

Gas discharge tubes (GDT) use noble gasses enclosed in ceramic tubes to provide an alternate circuit path for voltage spikes. The ceramic envelope and with nickel connectors allow for high loads. 2R-8TX Gas Discharge Tubes (GDT) series has a surge rating of 10kA/5kA/3KA, 8/20 μ s. This GDT series is perfectly suited for broadband equipment applications. The GDT's low off-state capacitance is compatible with high bandwidth applications and this capacitance loading value does not vary if the voltage across the GDT changes.



Agency Approvals

Agency	Standards	Certificate No.
	UL1449	E508408


Features

- I Excellent response to fast rising transients
- I Stable breakdown voltage
- I GHz working frequency
- I 8/20 μ s Impulse current capability: 10KA / 5KA
- I Non-Radioactive
- I Ultra Low capacitance (<3 pF)
- I Size: Φ 8*2 mm, Φ 8*2.5 mm, Φ 8*3.6mm
- I Storage and operational temperature: -40~+125°C

Applications

- I Telecom CPE
- I Communication equipment
- I Surge Protective Devices
- I High density PCB assemblies

Part Number Code

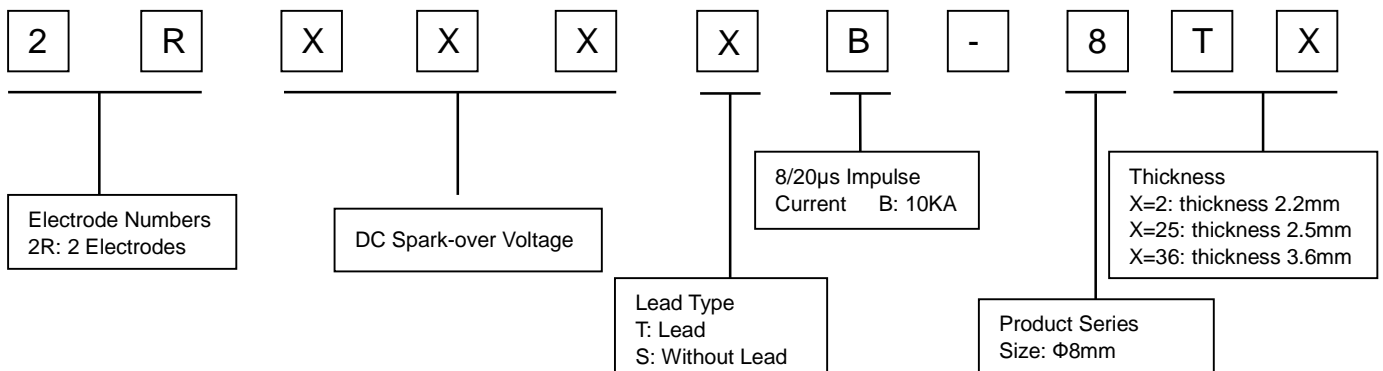

Gas Discharge Tubes (GDT)

2RS-8TX Series

Electrical Characteristics

Part Number	DC Spark-over Voltage ^{1) 2)} @100V/S	Impulse Spark-over Voltage		Insulation Resistance ³⁾	Capacitance @1MHz	Glow Voltage @10mA	Arc Voltage @1A	Life Ratings				
		100V/μS	1KV/μS					Impulse Discharge Current @8/20μS		Alternating Discharge Current @50Hz 1S		Impulse Life @10/1000μS
		Max	Max					±5 times	1 time	10 times	300 times	
		V	V					KA	KA	A	A	
2R090SB-8T2	90±20%	500	600	1	3	60	10	10	20	5	100	
2R230SB-8T2	230±20%	600	700	1	3	135	15	10	20	5	100	
2R350SB-8T2	350±20%	500	600	1	3	135	15	10	20	5	100	
2R470SB-8T2	470±20%	600	700	1	3	170	18	10	20	5	100	
2R600SB-8T2	540~780	750	850	1	3	180	18	10	20	5	100	
2R800SB-8T25	800±20%	1000	1100	1	3	200	20	10	15	3	100	
2R1000S-8T25	1000±20%	1200	1300	1	3	200	20	10	15	3	100	
2R1500S-8T25	1500±20%	1800	2000	1	3	200	20	10	15	3	-	
2R2000S-8T36	2000±20%	2400	2500	1	3	230	30	5	10	2.5	-	
2R2500S-8T36	2500±20%	3000	3200	1	3	230	30	5	10	2.5	-	
2R3000S-8T36	3000±20%	3600	3800	1	3	230	30	4	5	1	-	
2R3600S-8T36	3600±20%	4300	4500	1	3	230	30	4	5	1	-	
Glow to Arc transition Current.....					~0.5A							
Weight.....					2RSB-8T2: ~0.58g 2RSB-8T25: ~0.65g 2RSB-8T36: ~0.90g							
Operation and storage temperature.....					-40~+125°C							
Climatic category (IEC 60068-1).....					40/125/21							
Marking.....					without							
Surface treatment.....					Matte-tin plated							
Moisture sensitivity level ⁴⁾					1							

¹⁾ At delivery AQL 0.65 level II, DIN ISO 2859.

²⁾ In ionized mode.

³⁾ Insulation Resistance Measuring Voltage:

90V~150V at DC 50V

Other at DC 100V

⁴⁾ Tests according to JEDEC J-STD-020.

Terms in accordance with ITU-T Rec. K.12, IEC 61643-311, GB/T18802.311, GB/T 9043.

Gas Discharge Tubes (GDT)

2RS-8TX Series

Certifications table


Part Number	 UL1449 E508408	Part Number	 UL1449 E508408
2R090SB-8T2	●	2R1000S-8T25	--
2R230SB-8T2	●	2R1500S-8T25	--
2R350SB-8T2	●	2R2000S-8T36	--
2R470SB-8T2	●	2R2500S-8T36	--
2R600SB-8T2	●	2R3000S-8T36	--
2R800SB-8T25	●	2R3600S-8T36	--

Notes:


1. ● indicates that the product has passed the certification.
2. -- indicates that the product is not certified.

Dimensions (Unit: mm/inch)


2RSB-8T2

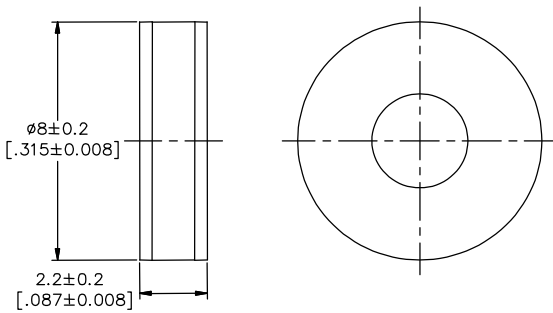

2RSB-8T25

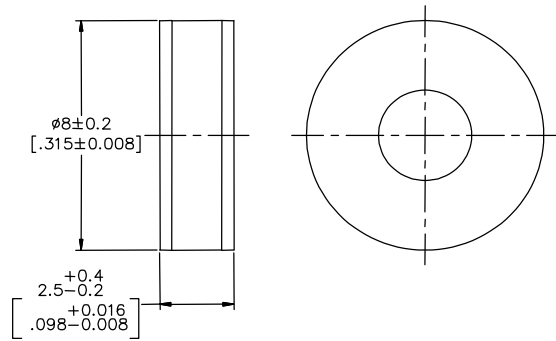


2RSB-8T36

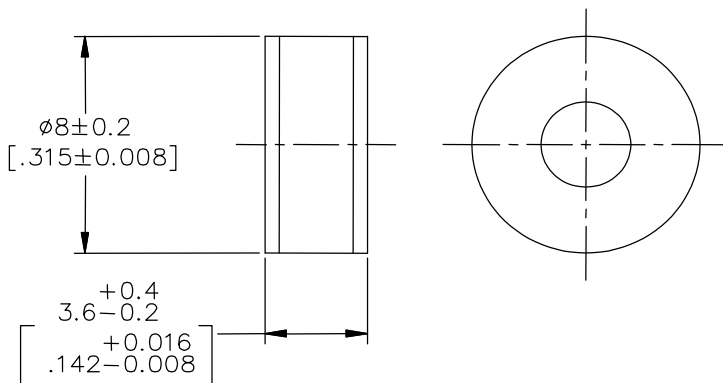


Gas Discharge Tubes (GDT)

2RS-8TX Series

Packaging Information

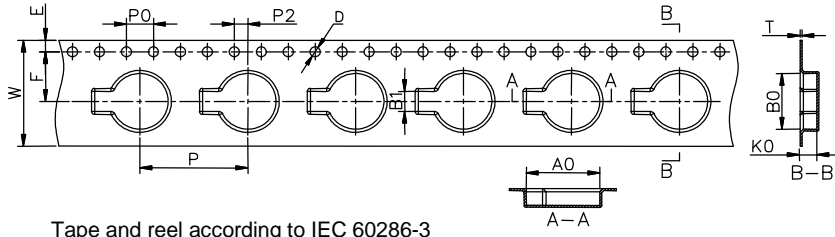

Tape and reel according to IEC 60286-3

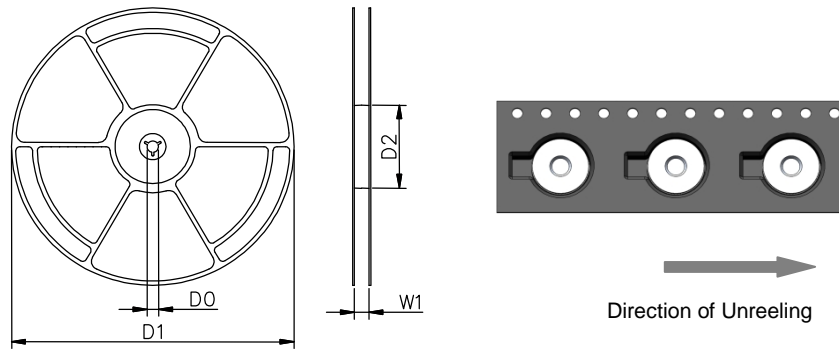

Symbol	Millimeters	Inches
W	16±0.3	0.630±0.012
A0	10.9±0.1	0.429±0.004
B0	8.4±0.1	0.331±0.004
B1	3.0±0.1	0.118±0.004
K0	2.5±0.1	0.098±0.004
P	16±0.1	0.630±0.004
F	7.5±0.1	0.295±0.004
E	1.75±0.1	0.069±0.004
D	1.5+0.1/-0.0	0.059+0.004/-0.0
P0	4±0.1	0.157±0.004
P2	2±0.1	0.079±0.004
T	0.3±0.05	0.012±0.002
D0	13.3±0.15	0.524±0.006
D1	330±2	12.992±0.079
D2	100+1/-2	3.937+0.039/-0.079
W1	16.5±0.4	0.65±0.016


2RSB-8T2 / 2RSB-8T25			
	Reel	Inner Box	Carton
Size	330×20.5mm	340×333×70mm	375×353×380mm
Quantity	MPQ/MOQ: 1 reel=1,500pcs	1 Inner Box=3 reels=4,500pcs	1 Carton=5 Inner boxes=22,500pcs
Photos			

Gas Discharge Tubes (GDT)

2RS-8TX Series

2RSB-8T36			
	Reel	Inner Box	Carton
Size	330×20.5mm	340×333×70mm	375×353×380mm
Quantity	MPQ/MOQ: 1 reel=1,000pcs	1 Inner Box=3 reels=3,000pcs	1 Carton=5 Inner boxes=15,000pcs
Photos			

Soldering Parameters - Reflow Soldering (Surface Mount Devices)

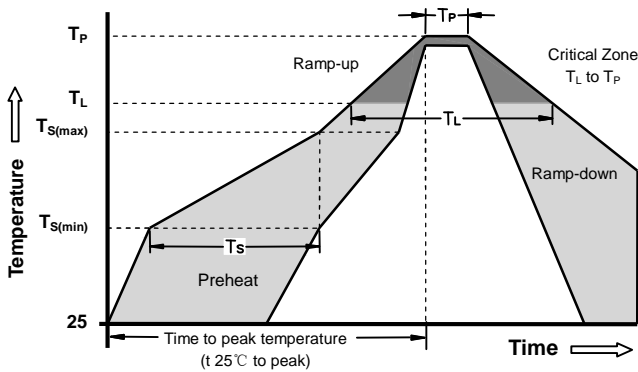

Reflow Condition		Pb - Free assembly
Pre Heat	-Temperature Min ($T_{s(min)}$)	150°C
	-Temperature Max ($T_{s(max)}$)	200°C
	- Time (min to max) (t_s)	60 - 180 Seconds
Average ramp up rate (Liquids Temp T_L to peak)		3°C/second max
$T_{s(max)}$ to T_L - Ramp-up Rate		5°C/second max
Reflow	- Temperature (T_L) (Liquids)	217°C
	- Time (min to max) (t_s)	60 - 150 Seconds
Peak Temperature (T_p)		260 +0/-5°C
Time within 5°C of actual peak Temperature (t_p)		10 - 30 Seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (T_p)		8 minutes Max
Do not exceed		260°C

Surface mounted components (SMD) may exhibit a temporary increase in the DC spark-over voltage after the solder reflow process. The components will recover within 24 hours. There is no quality defect nor change in protection levels during the temporary change in DC spark-over voltage.

Terms and definitions

NO.	Item	Definitions
1	Gas discharge tube(GDT)	A gap, or several gaps, in an enclosed discharge medium, other than air at atmospheric pressure, designed to protect apparatus or personnel, or both, from high transient voltages. Also referred to as "gas tube surge arrester".
2	DC Spark-over Voltage	The voltage at which the gas discharge tube sparks over with slowly increasing d.c. voltage.
3	Impulse Spark-over Voltage	The highest voltage which appears across the terminals of a gas discharge tube in the period between the application of an impulse of given wave-shape and the time when current begins to flow.
5	Arc voltage	Voltage drop across the GDT during arc current flow.
6	Glow voltage	Peak value of voltage drop across the GDT when a glow current is flowing.
7	Impulse discharge current 8/20µs	Current impulse with a nominal virtual front time of 8 µs and a nominal time to half-value of 20 µs.
8	Alternating Discharge Current	The rms value of an approximately sinusoidal alternating current passing through the gas discharge tube.
9	Insulation Resistance	Insulation resistance shall be measured from each terminal to every other terminal of the GDT. The test is performed with DC50V when normal spark-over Voltage 70~150V, others with DC100V.
10	Capacitance	The capacitance shall be measured once at 1 MHz between all terminals unless otherwise specified.

Cautions and warnings

- I Do not operate surge arresters in power supply networks, whose maximum operating voltage exceeds the minimum spark-over voltage of the surge arresters.
- I Surge arresters may become hot in the event of longer periods of current stress (burn risk). In the event of overload the connectors may fail or the component may be destroyed.
- I Surge arresters must be handled with care and must not be dropped.
- I Do not continue to use damaged surge arresters.
- I The shown SMD pad dimensions represent a safe way to mount the arrester and are a recommendation of the manufacturer. During the reflow process it must be assured that no solder material reduces the insulation distance between the pads below the arrester.
- I SMD surge arresters should be soldered within 24 month after shipment.